

LIDT TEST RESULTS

LIDT VALUE

10 ⁶ -on-1	0.359 ^{+0.048} / _{-0.047} J/cm ²
-----------------------	---

CHARACTERISTIC DAMAGE CURVE

Table 1: Estimated LIDTs from fitting model for sample CAM26_4H_1.

Test mode	Threshold (Catastrophic)	Threshold (Color mode)
1-on-1	0.928 ^{+0.123} / _{-0.119} J/cm ²	0.870 ^{+0.116} / _{-0.113} J/cm ²
10-on-1	0.737 ^{+0.111} / _{-0.106} J/cm ²	-
10 ² -on-1	0.468 ^{+0.057} / _{-0.057} J/cm ²	-
10 ³ -on-1	0.468 ^{+0.057} / _{-0.057} J/cm ²	-
10 ⁴ -on-1	0.468 ^{+0.057} / _{-0.057} J/cm ²	-
10 ⁵ -on-1	0.468 ^{+0.057} / _{-0.057} J/cm ²	-
10 ⁶ -on-1	0.412 ^{+0.049} / _{-0.049} J/cm ²	0.359 ^{+0.048} / _{-0.047} J/cm ²

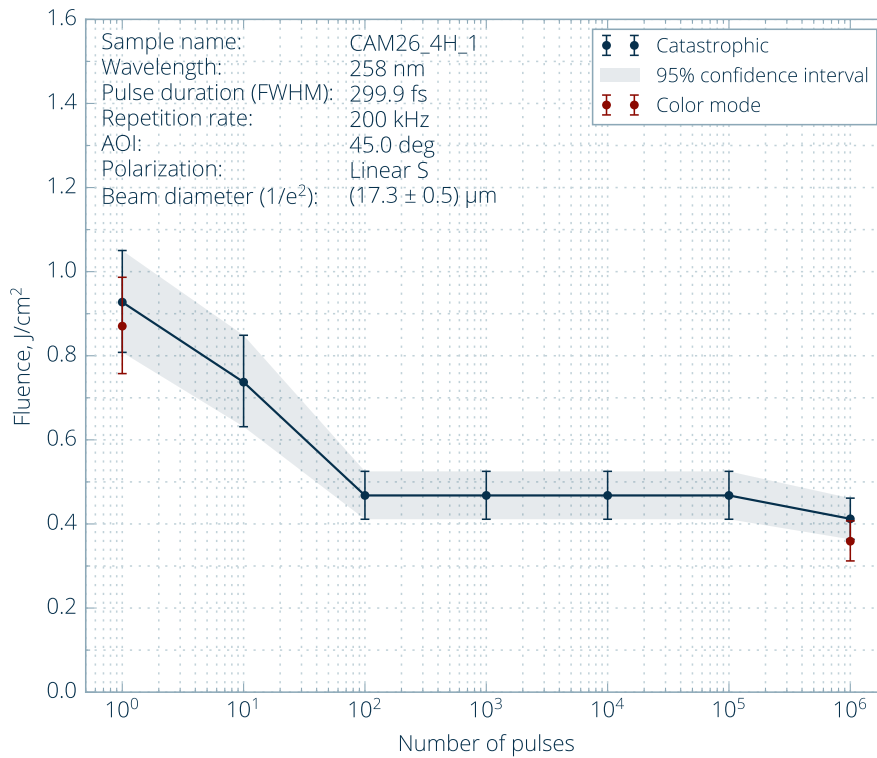


Figure 2. Characteristic damage curve.