

# LIDT TEST RESULTS

## LIDT VALUE

$10^3$ -on-1	$12.0^{+2.0}_{-3.1}$ J/cm <sup>2</sup>
--------------	--

## CHARACTERISTIC DAMAGE CURVE

Table 1: Estimated LIDTs from fitting model for sample PAN6702\_500.

Test mode	Threshold (Offline detection - microscopy)	Threshold (Online detection - scattering)
1-on-1	$22.0^{+5.6}_{-11.5}$ J/cm <sup>2</sup>	$22.5^{+5.0}_{-12.2}$ J/cm <sup>2</sup>
10-on-1	-	$13.3^{+1.4}_{-3.4}$ J/cm <sup>2</sup>
$10^2$ -on-1	-	$12.0^{+2.2}_{-3.1}$ J/cm <sup>2</sup>
$10^3$ -on-1	$12.2^{+1.9}_{-2.6}$ J/cm <sup>2</sup>	$12.0^{+2.0}_{-3.1}$ J/cm <sup>2</sup>

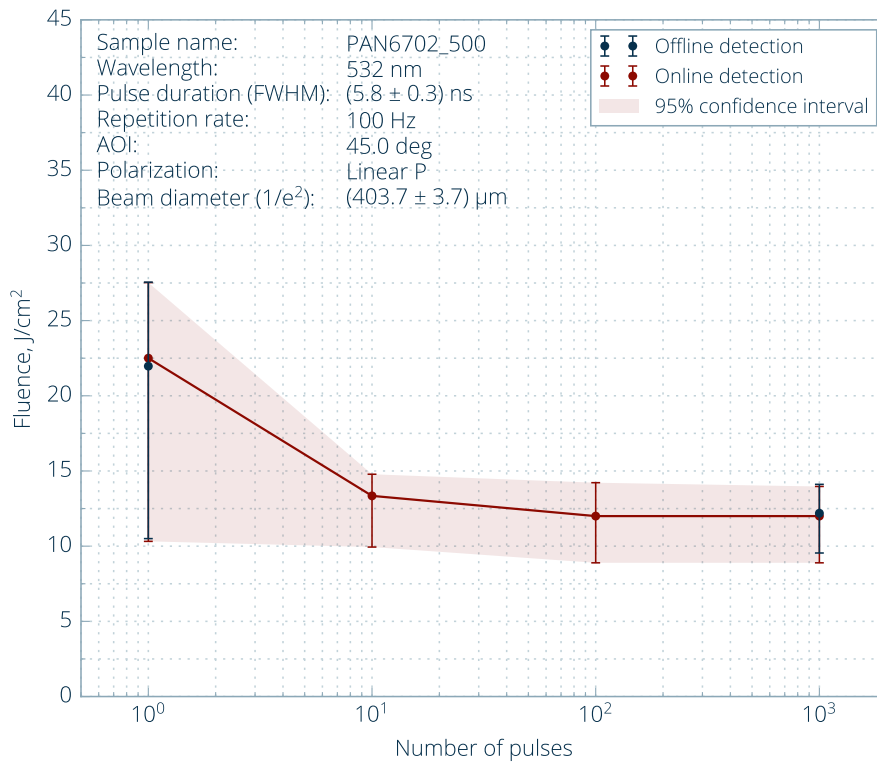


Figure 2. Characteristic damage curve.